STI MOTION DETECTOR DAMAGE STOPPER®

Protection for PIR Units

These super tough cages are extremely effective in reducing malfunctions and high maintenance costs where vandalism or accidental damage is prevalent. They are constructed of 9-gauge steel wire with corrosion-resistant polyester coating. Five sizes are available. Two sizes are designed to fit motion detectors for corner mount units and three are for wall mount applications.

Backed By a Lifetime Guarantee

As all STI protective covers, these Motion Detector Damage Stoppers are backed by a lifetime guarantee against breakage in normal use. Installation and servicing are easy. They are highly recommended for areas where abuse to PIR detectors is severe.





STI-9618

STI-9619



STI-9620



STI-9621



STI-9622

eatures

- Helps prevent vandalism or accidental damage to PIR's.
- Construction of 9-gauge coated steel wire.
- Fast and easy installation.
- May be spray painted only once prior to installation to match decor.
- Simple removal for servicing detector.
- Five models to fit virtually all PIR detectors.
- Tamper resistant hardware is available.
- Lifetime guarantee against breakage in normal use.



Safety Technology International, Inc.

2306 Airport Road • Waterford, Michigan 48327-1209

Phone: 248-673-9898 • Fax: 248-673-1246 • Toll Free: 800-888-4784 • E-mail: info@sti-usa.com • Web: www.sti-usa.com

STI MOTION DETECTOR DAMAGE STOPPER® Dimensions and Technical Information


STI-9618 Motion Detector Damage Stopper - Corner Mount STI-9619 Motion Detector Damage Stopper - Corner Mount


STI-9620 Motion Detector Damage Stopper STI-9621 Motion Detector Damage Stopper STI-9622 Motion Detector Damage Stopper

SUB-82 4 tamper resistant stainless steel screws, #8 X 1 1/2 " snake eye


19038 Tamper bit for tamper resistant screws


Model	Height	Width	Depth
STI-9618	4.62 in (117 mm)	5.37 in (136 mm)	3 in (76 mm)
STI-9619	7.75 in (196mm)	5.37 in (136mm)	5.62 in (142 mm)
STI-9620	6.25 in (158 mm)	4.0 in (102 mm)	2.25 in (57 mm)
STI-9621	7.0 in (178 mm)	5.75 in (146 mm)	4.5 in (114 mm)
STI-9622	8.75 in (222 mm)	4.0 in (102 mm)	3.75 in (95 mm)

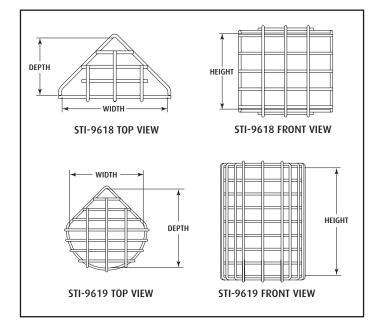


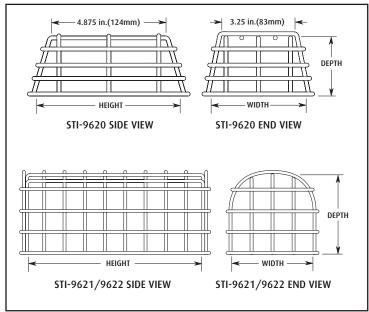












STI-9618

STI-9619

STI-9620

STI-9621

STI-9622