



NON-INSULATED FIRE RATED ACCESS DOOR WITH DRYWALL BEAD

Available at Hallmann Sales, LLC
866-966-9596
info@hallmann-sales.com

Model KRP-450FR
For Walls Only

DATE



KARP ASSOCIATES, INC.
260 Spagnoli Road Melville, NY 11747
(631) 768-8300 - Phone
(631) 768-8350 - Fax

SPECIFICATIONS

GENERAL SCOPE:

Classified access frame and fire door assembly 1 1/2 hour "B" Label Underwriters Laboratories File # A-10806. Warnock Hersey File # U51466.

CONSTRUCTION:



1. Frame shall be 16 gage steel, 1" wide, surrounded by galvanized drywall bead.
2. Door shall be 16 gage steel, and shall open to 175°, be self-latching with automatic closer and interior latch release.
3. Hinge shall be continuous piano hinge.
4. Latches shall be spring loaded sliding bolt type, keyed paddle latch, all keyed alike. Door can be prepared for a rim cylinder lock.
5. Finish shall be prime coat of rust inhibitive electrostatic powder, baked white enamel. Stainless steel doors shall have #4 satin finish.

STANDARD SIZES

DOOR SIZE H X W (IN.)	WALL OPENING (IN.)	NUMBER OF LATCHES	SHIP WT. (LBS.)
8 x 8	8 3/8 x 8 3/8	1	4.3
12 x 12	12 3/8 x 12 3/8	1	7.2
14 x 14	14 3/8 x 14 3/8	1	8.3
16 x 16	16 3/8 x 16 3/8	1	9.9
18 x 18	18 3/8 x 18 3/8	1	11.7
24 x 24	24 3/8 x 24 3/8	1	17.4
30 x 22	30 3/8 x 22 3/8	1	19.1
30 x 30	30 3/8 x 30 3/8	1	23.9
36 x 24	36 3/8 x 24 3/8	2	24.1
36 x 36	36 3/8 x 36 3/8	2	33.5

PROJECT DATA
Project Name:
Architect:
Contractor:
Agent/Customer Name:
Tagging Instructions:
Special Instructions:

PROJECT SCHEDULE					
Qty.	H	W	No. of Latches	Finish	Remarks

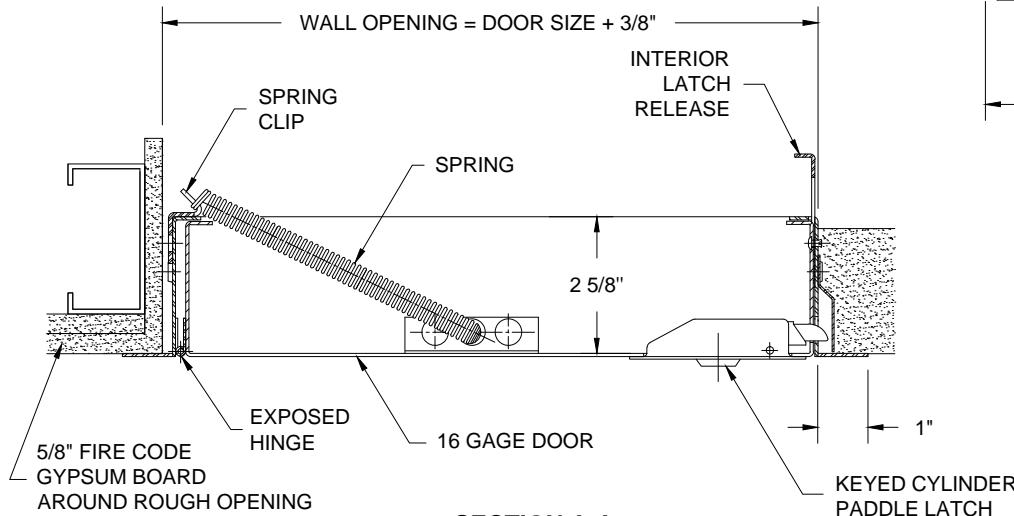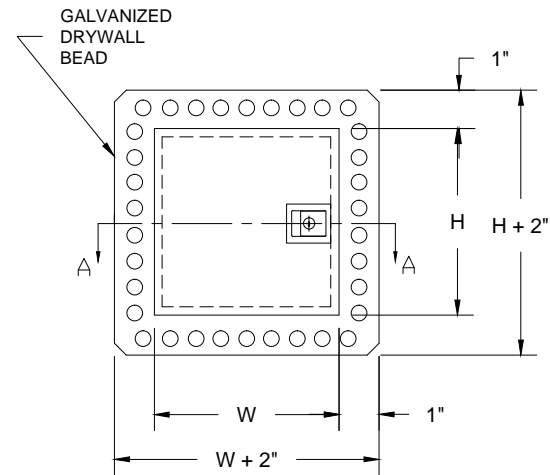

SECTION A-A



Made with Union Labor