

## DW Series



---

### Dry Wall Access Doors

**Doors** are ideally suited for new installations or for remodeling, in masonry, tile, wood or other wall and ceiling surfaces. Door features rounded safety corners.

**Door and Frame** are fabricated from 16 gage, galvanized steel with a prime coat finish.

**Frame** is one piece construction, 1" wide and provides perfect concealment of the rough wall opening. Wall frame is provided with 1/4" mounting holes for fastening within the furred spaces allowing faster installation and fixing maximum clearance.

**Concealed Pivoting Rod Hinge** prevents distortion and closes door squarely. Doors 24" or larger are provided with a continuous piano hinge.

**Latch** is screwdriver operated.

**Finish** is a prime coat suitable for painting.

### Guide Specification

Provide Elmdor<sup>®</sup> DW Series, Dry Wall Access Doors (Specify model number and options.) Access door and frame shall be fabricated from 16 gage, galvanized steel with a prime coat finish. The door shall have rounded safety corners and a concealed pivoting rod hinge. Frame shall be one piece construction with no mitres or welds on the face. Latch shall be screwdriver operated. Finish shall be a prime coat suitable for painting.



Member of U.S. Green  
Building Council

**DW**

Revised: 2/19/16



**MODEL NUMBER AND OPTIONS SELECTION**

**BASE MODEL NUMBER**

- DW Dry Wall Access Door  
(16 Gage Steel)



**Suffix Options**

- AKL Allen Key Latch
- CL Cylinder Lock (one per door)
- MAS Masonry Anchor Straps
- MLP Mortise Cylinder Lock (Prep)
- PCW Prime Coat White
- SS Stainless Steel Construction.  
(Type 304 No 4 Finish Satin Finish)
- TH 'T' Handle

**STANDARD AVAILABLE SIZES**

Special sizes available upon request.

NOMINAL DOOR SIZE (W X H)	WALL OPENING	LATCHES	WEIGHT
DW 6" x 6"	6-1/2" x 6-1/2"	1	3 lbs.
DW 8" x 8"	8-1/2" x 8-1/2"	1	3 lbs.
DW 8" x 12"	8-1/2" x 12-1/2"	1	4 lbs.
DW 10" x 10"	10-1/2" x 10-1/2"	1	4 lbs.
DW 12" x 12"	12-1/2" x 12-1/2"	1	5.5 lbs.
DW 12" x 16"	12-1/2" x 16-1/2"	1	6 lbs.
DW 12" x 18"	12-1/2" x 18-1/2"	2	6.5 lbs.
DW 12" x 24"	12-1/2" x 24-1/2"	2	9.5 lbs.
DW 14" x 14"	14-1/2" x 14-1/2"	1	6 lbs.
DW 14" x 20"	14-1/2" x 20-1/2"	2	8 lbs.
DW 14" x 24"	14-1/2" x 24-1/2"	2	15 lbs.
DW 15" x 15"	15-1/2" x 15-1/2"	1	6.5 lbs.
DW 16" x 16"	16-1/2" x 16-1/2"	1	7.5 lbs.
DW 16" x 20"	16-1/2" x 20-1/2"	2	8.5 lbs.
DW 16" x 24"	16-1/2" x 24-1/2"	2	10 lbs.
DW 18" x 18"	18-1/2" x 18-1/2"	3	9 lbs.
DW 18" x 24"	18-1/2" x 24-1/2"	5	12 lbs.
DW 18" x 36"	18-1/2" x 36-1/2"	3	16 lbs.
DW 20" x 20"	20-1/2" x 20-1/2"	3	11 lbs.
DW 20" x 24"	20-1/2" x 24-1/2"	3	13 lbs.
DW 20" x 30"	20-1/2" x 30-1/2"	5	15 lbs.
DW 22" x 22"	22-1/2" x 22-1/2"	3	12 lbs.
DW 22" x 30"	22-1/2" x 30-1/2"	3	16 lbs.
DW 24" x 24"	24-1/2" x 24-1/2"	3	15 lbs.
DW 24" x 30"	24-1/2" x 30-1/2"	6	17 lbs.
DW 24" x 36"	24-1/2" x 36-1/2"	5	20.5 lbs.
DW 24" x 48"	24-1/2" x 48-1/2"	7	28 lbs.
DW 30" x 30"	30-1/2" x 30-1/2"	7	21.5 lbs.
DW 32" x 32"	32-1/2" x 32-1/2"	7	23 lbs.
DW 36" x 36"	36-1/2" x 36-1/2"	8	31.5 lbs.
DW 36" x 48"	36-1/2" x 48-1/2"	9	42 lbs.
DW 48" x 48"	48-1/2" x 48-1/2"	11	58 lbs.

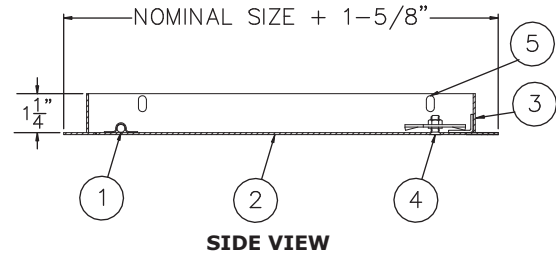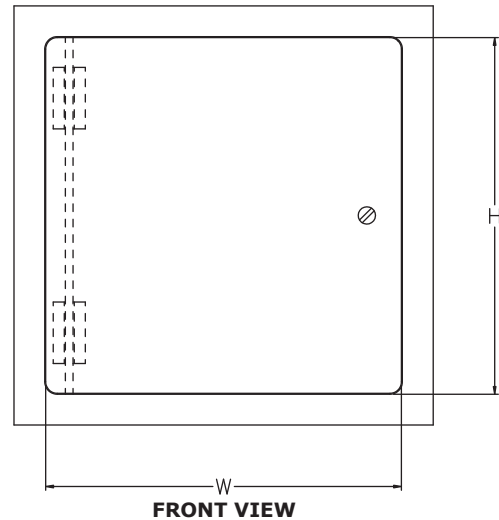

- NOTES:
1. CONCEALED PIVOTING ROD HINGE
  2. DOOR
  3. FRAME
  4. SCREWDRIIVER OPERATED LATCH
  5. MOUNTING HOLES

Dimensions are subject to manufacturer's tolerance of plus or minus 1/4". Elmdor/Stoneman assumes no responsibility for use of void or suspended data. Please visit [www.elmdorstoneman.com](http://www.elmdorstoneman.com) for most current specifications. © Copyright 2009 Elmdor/Stoneman, City of Industry, CA, A Division of Acorn Engineering Company.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING	
Model Number & Options _____	Quantity _____
Company _____	Date _____
Contact _____	Title _____
Approval for Manufacturing/Signature _____	

**DW**

Revised: 2/19/16