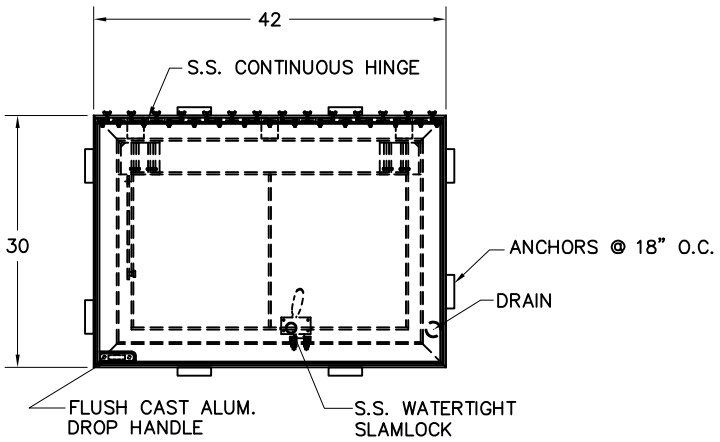

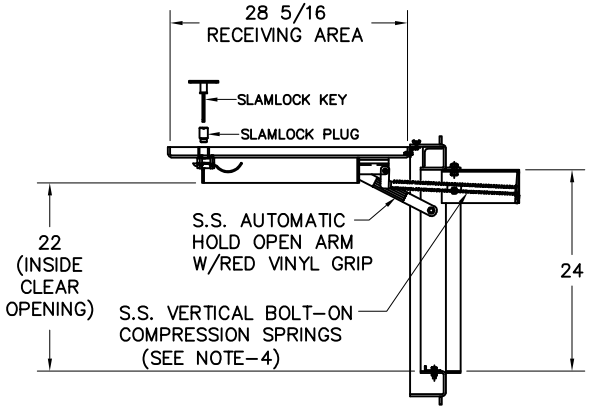

NOTE:

1- MATERIAL: ALUMINUM
2- LOADING: 300 LBS. PER SQ. FT.
3- 316 STAINLESS STEEL BOLTS & NUTS
4- SPRING KIT SUPPLIED SEPARATELY & TO BE ASSEMBLED IN FIELD (BY OTHERS)
5- AREA OF FRAME IN CONTACT WITH CONCRETE TO BE PAINTED WITH BITUMINOUS COATING.
6- APPROX. HATCH WEIGHT: 99 LBS.

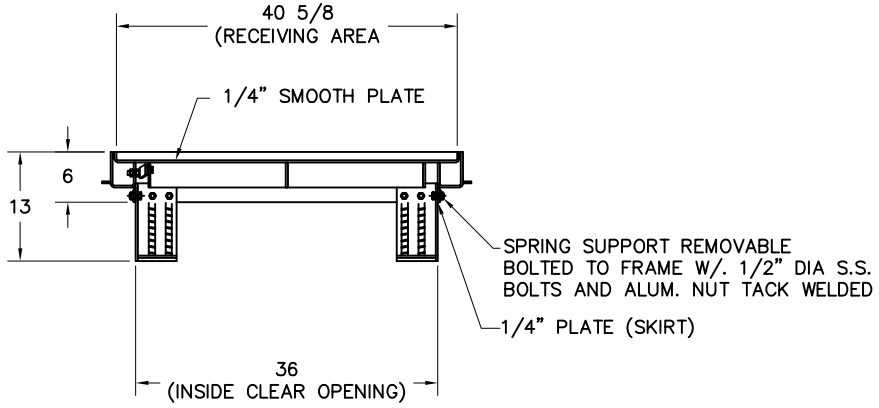

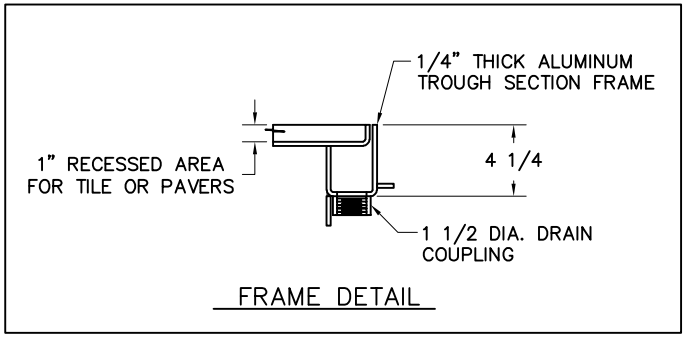

FRAME DETAIL

THIS DOCUMENT IS THE PROPERTY OF ACUDOR PRODUCTS, INC AND CONTAINS PROPRIETARY INFORMATION. IT SHALL NOT BE MODIFIED, COPIED, FURNISHED NOR DISTRIBUTED (IN WHOLE OR IN PART) WITHOUT PROPER AUTHORIZATION OF ACUDOR PRODUCTS, INC.

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M

BREAK ALL SHARP CORNERS & EDGES TO 0.01

TOLERANCES UNLESS OTHERWISE SPECIFIED:
INCHES = ± 1/16
1/16 = ± 1/32
1/32 = ± 1/64

COPYRIGHT © 2017 ALL RIGHTS RESERVED

ACUDOR PRODUCTS

FT-8050 24 X 36 ALUMINUM
W/BOLT-ON SPRINGS, SLAMLOCK, BIT. PAINT & 1" REC. FOR TILE/PAVERS

DRAWN BY: C.S.	SCALE: 1=12	SHEET: 1 OF 2	DATE: 02/1/17
APP'D BY: C.S.	DWG. NO: 1000056628	SHEET SIZE: C	REV: 0