

RHG-SEC SECURITY ROOF HATCH, GALVANIZED

Application

Acudor Security Roof Hatches are designed to provide convenient, economical access to the roof of a building while adding an additional level of security. The heavy gauge materials used to manufacture this hatch are ideal for applications in banks, prisons, hospitals and more.

Features RHG-SEC

- Weather tight construction
- Convenient one-hand operation
- 12" high insulated curb
- Supports 40lbs./sq. ft. live load
- G90 Galv. Steel

Louvered Curbs

Stainless Steel Hardware

Optional Features RHG-SEC

- Stainless Steel cover, curb
- Aluminum Material Curb Mounted Units
- Curb pitch corrected for sloped roof
- Higher curb heights for "green roof" applications

RHG Specifications:

- **Cover:** Double-skin construction ("in box type design") with 1" Polyiso (R-6) insulation and a continuous EPDM foam weather/draft seal gasket that is attached to the inside of cover to provide a flush, tight fit. Designed to support a live load of 40lbs./sq. ft., the cover is 10 gauge galvanized steel with a 18 gauge galvanized steel inside liner.
- Curb: 10 gauge galvanized steel with 1" thick Polyiso (R-6) insulation with Fiberglass liner at curb exterior. Curb is 12" high, with 3.375" wide bottom flange and pre-drilled mounting holes.

Hinge: Heavy duty galvanized steel pintle hinges with 3/8" SS pin

Opening: Gas spring operators allow cover to open and close with ease. Stainless Steel inside pull handle allows for easy control when closing cover.

RHG-SEC STANDARD SIZES (other sizes available)


Model	Curb ID L&W inches (mm)	Weight per Hatch materials Ibs. (kg.)	
GSEC3232	24 X 24 (610 X 610)		50 (114)
GSEC3224	24 X 36 (610 X 914)	GAL. 2	70 (122)
GSEC3838	30 X 30 (762 X 762)	GAL. 2	30 (128)
GSEC3844	30 X 36 (762 X 914)	GAL. 3	10 (142)
GSEC4444	36 X 36 (914 X 914)	GAL. 34	40 (154)

For detailed specifications see submittal sheet



Door Latch: Self latching, zinc plated outside T handle with stainless steel inside lock and lever assembly. Heavy duty detention lock with paracentric key. Unit also has inside and outside padlock provisions.

Finish: Material is prepared with an iron phosphate wash, followed by a rust inhibiting primer, and then a baked on polyester enamel paint.

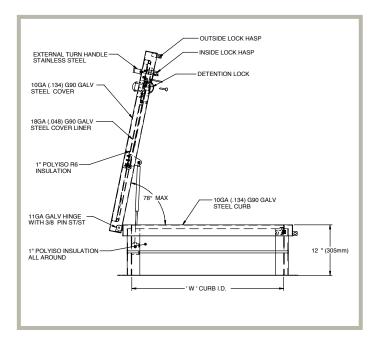

U.S.A.: info@acudor.com / 800.722.0501

CANADA: info@acudor.ca / 844.228.3671 MEXICO : infomx@acudor.com / +521 (844) 101-0081 MIDDLE EAST & INDIA : manojmani@acudor.com

INTERNATIONAL: info@acudorintl.com / 905.428.2240 SITE: www.acudor.com

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright 🔍 2020 Acudor Products. This product is the proprietary property of Acudor Products. It is sold and distributed by Hallmann Sales with proper authorization.